

LIGHT. ROBUST. POWERFUL.

# GRIZZLY M350e – THE NEW POWERFUL FORESTRY MULCHER FOR SMALL EXCAVATORS

The brand-new Grizzly M350e excavator head is a completely new designed forestry mulcher for 3.5–7 t excavators.

It is equipped with a powerful 60 cc hydraulic motor or a gear motor (20, 25, 30, 40, 45 cc) to cover the flow range of small excavators and to achieve the best performance for perfect mulching results.



The side cover of the poly chain is easy to open for regularly checks or maintenance

14" Rotor with 16x BCS tools (BCS06)

Wear resistant skids made from Hardox to protect the housing




## HOUSING

Strong and robust housing made from Hardox for the forestry application with good access to all the service points. It is covered with counter blades which ensure additional shredding of the material while passing the housing.



## PROTECTION FLAP

The optional hydraulic flap (also available in electric version), provides extra protection while mulching next to roads or in residential zones.

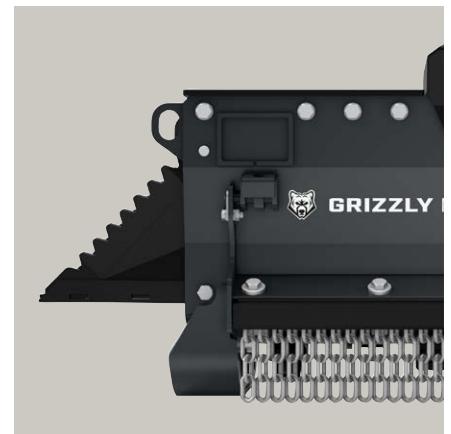

## THUMB BRACKET

The optional thumb bracket helps to move the material to be mulched. With the installation of a counterpart, a gripper can also be added to move the mulching material.

**Pinoth**<sup>®</sup>

# VERSATILE AND STRONG

The mulcher can be used universally:  
for mulching of bushes and brushwood  
as well as trunk wood.



## MAIN TECHNICAL BENEFITS

- Powerful 60cc HD-variable displacement motors
- Powerful gear motor options available (20, 25, 30, 40, 45 cc), no case drain line necessary
- Transfer with poly chain system prevents slippage and is low-maintenance
- Hydraulic connections are protected inside the housing
- Available with or without flap, electronically or hydraulically controlled (optional)
- Optional fixed thumb bracket available

## TECHNICAL DATA GRIZZLY M350e

Working width	29.5 in (750 mm)
Total width	48 in (1,218 mm)
Weight*	750 lbs (340 kg)
Rotor diameter	14 in (350 mm)
Volume flow	11.9 – 39.6 gpm (45 – 150 l/min)
Tools	16 x BCS (BCS06)
Height	28 in (715 mm)
Depth (without flap)	21.9 in (550 mm)
Depth (with flap)	22.1 in (561 mm)

\* Weight/total width depending on the configuration of the machine

### Prinoth GmbH

Im Branden 15  
88634 Herdwangen  
GERMANY  
Phone +49 7557 92120  
[prinoth.germany@prinoth.com](mailto:prinoth.germany@prinoth.com)

### Prinoth AG

Brennerstraße 34  
39049 Sterzing  
ITALY  
Phone +39 0472 72 26 22  
[prinoth@prinoth.com](mailto:prinoth@prinoth.com)

Locate your nearest sales and service points at [vm.prinoth.com](http://vm.prinoth.com)